
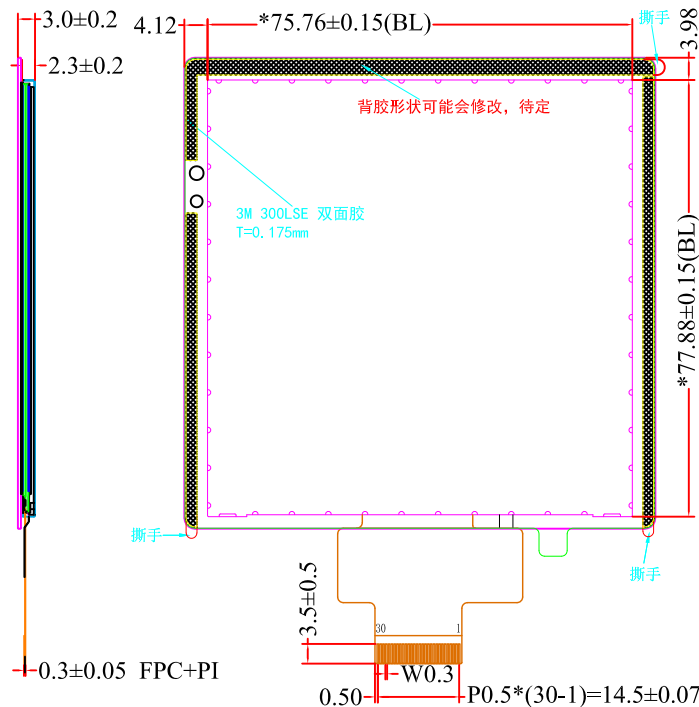


RoHS

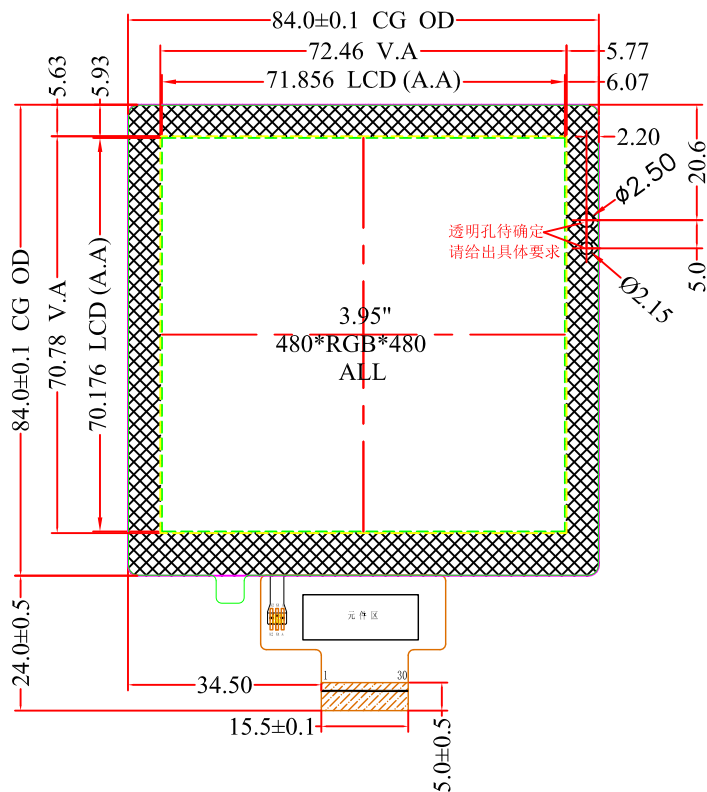


PIN	SYMBLE
1	LEDA
2	LEDK1
3	LEDK2
4	VCI
5	IOVCC
6	RESET
7	TE
8	PWM
9	GND
10	DOP
11	DON
12	GND
13	D1P N.C
14	D1N N.C
15	GND
16	CLKP
17	CLKN
18	GND
19	D2P N.C
20	D2N N.C
21	GND
22	D3P N.C
23	D3N N.C
24	GND
25	TP_INT
26	TP_SDA
27	TP_SCL
28	TP_RESET
29	TP_VCI
30	NC

技术参数

- 盖板: 旭硝子
- 工作温度: -20° C — +70° C
- 储存温度: -30° C — +80° C
- 整机跌落测试: 64G钢球, 50cm高度中心点3次, 无碎裂情况
- 表面硬度: ≥6H Glass
- 环保: ROHS
- 透光率>85%
- 雾度<3%
- 未标注公差按±0.2mm, 开孔尺寸公差±0.05位置公差±0.15)

Display Type	TFT/Normally BLACK/TRANSMISSIVE
Display Resolution	DOTS: 480RGB*480
Viewing Angle	ALL
LCD Controller/Driver	ST77922
Logic Voltage	3.3V
Operation Temperature	-20°C ~ 70°C
Storage Temperature	+30°C ~ 80°C
Backlight Spec.	White LED (5 dies in series 2 parallel I=40mA V=15.0V)

盖板全贴合

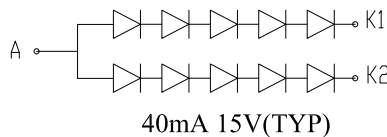

			深圳市爱普拓思科技有限公司					
			DRAWN:	蒋雨吉		TITLE:	DBT040XFC30M070A	
0.2	修改盖板透明孔	2024.07.15	CHECK:			DOC. NO.		
0.1	新制订	2024.07.12	APPROVE:	王加林		PART NO.	SCALE	1:1
REV.	DESCRIPTION	DATE	APPROVE:	王加林		REV.	0.2	SHEET 1 OF 1
						UNITS:	mm	