


深圳市爱普拓思科技有限公司

Customer Code.:
CUSTOMER'S P/N:


SPECIFICATION OF BACKLIGHT
EDITION: 01

Date: Page: 1/1 THE THIRD ANGLE FX'S P/N(exclude wrapper): DBT156BHN30E050A

FX'S P/N:
(include wrapper)
Approval (核准)
Check (检查)
Design (设计)

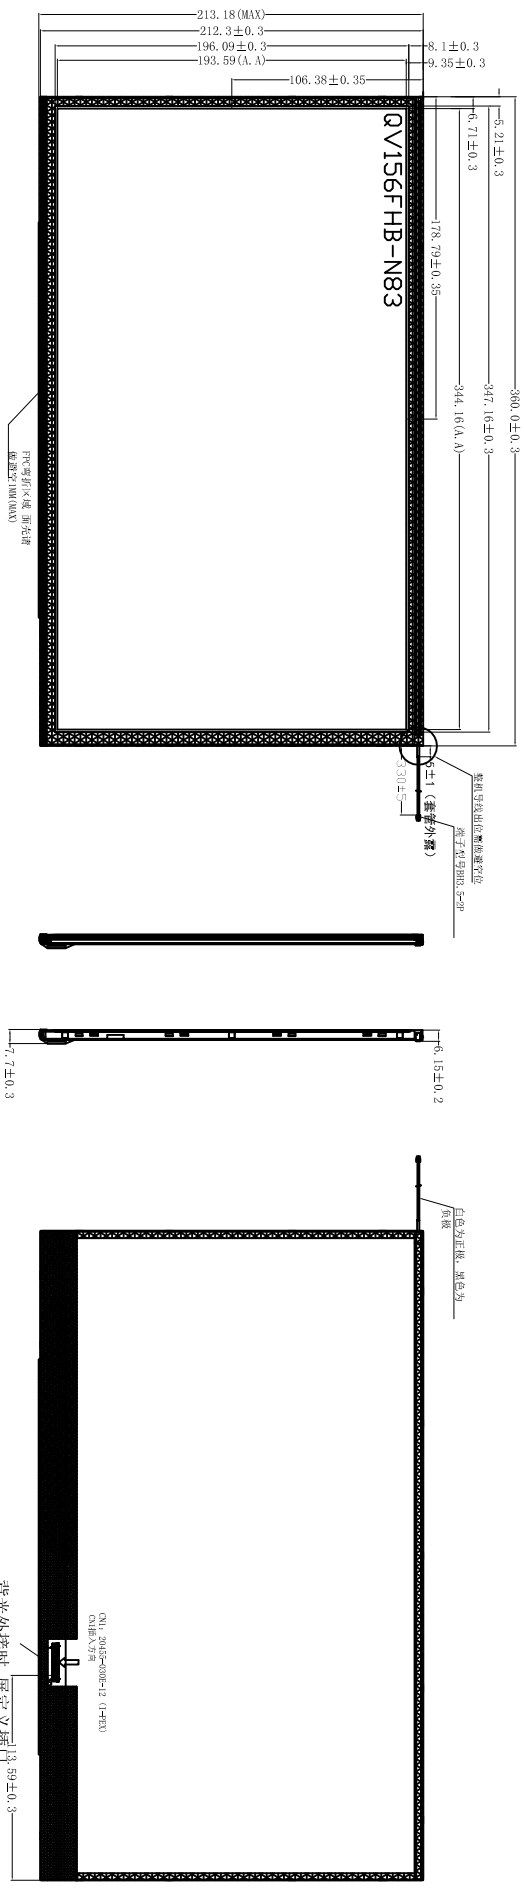

- Notes:
- Unit:mm.
 - Do not scale drawing.
 - All radii without dimension R0.2.
 - Modification Mark.
 - draft angle: 1°
 - Backlight Luminance :模组500cd/m²(TYP)
 - Luminance uniformity: 75% (min) (min/max*100%)
 - Unspecified Tolerance is ±0.2
 - Operation conditions : If= 300mA (TYP) , VF=28-32V (MAX)
 - Color coordinate: X=0.27-0.35, Y=0.27-0.35 (模组)
 - All materials comply with RoHS
 - The measured value of Luminance and color coordinate bases FX' s BM-7
 - Check item: 1~9

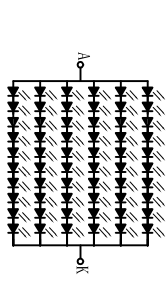

Backlight LED Circuit

REV	DATE	DESCRIPTION (修改内容)	REVISER	NO.	TITLE	Quantity
12		Front iron Frame (上铁框)		1		1
11		PPC (印制电路板)		0		0
10		Double sided stick (双面胶)		2		2
9		HOUSING (塑胶框)		1		1
8		PCB(印制电路板)		1		1
7		Wire (导线)		1		1
6		LED (发光二极管)		60		60
5		BEEF(薄片)		2		2
4		Diffuser Film(扩散片)		1		1
3		Light guide plate (导光板)		1		1
2		Reflector film (反射膜)		1		1
1		Rear iron frame (下铁框)		1		1

Customer: 客户: 1 2 3 6 7 8

Approval Date: 确认日期

Approve by: 确认