



# 深圳市爱普拓思科技有限公司

Date: 2024.02.19 Page: 1/1 THE THIRD ANGLE

Customer Code:  
Customer's P/N


Product Model DBT156DHN30E028A

SPECIFICATION OF BACKLIGHT  
Edition (版本) 01  
Approval (核准)  
Check (检查)  
Design (设计)

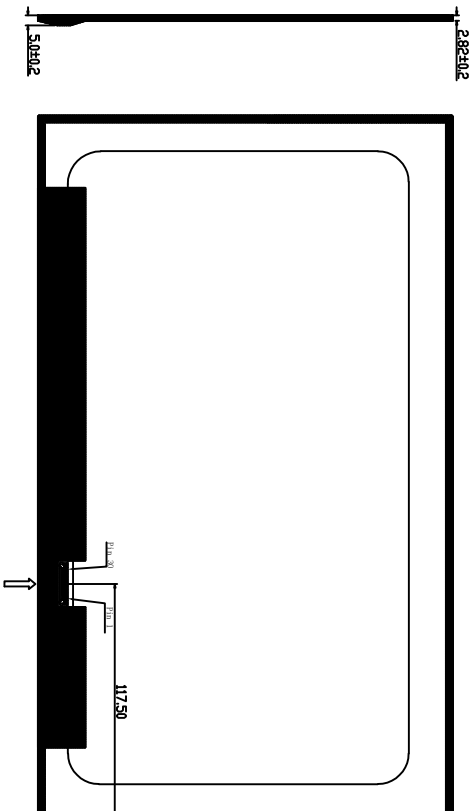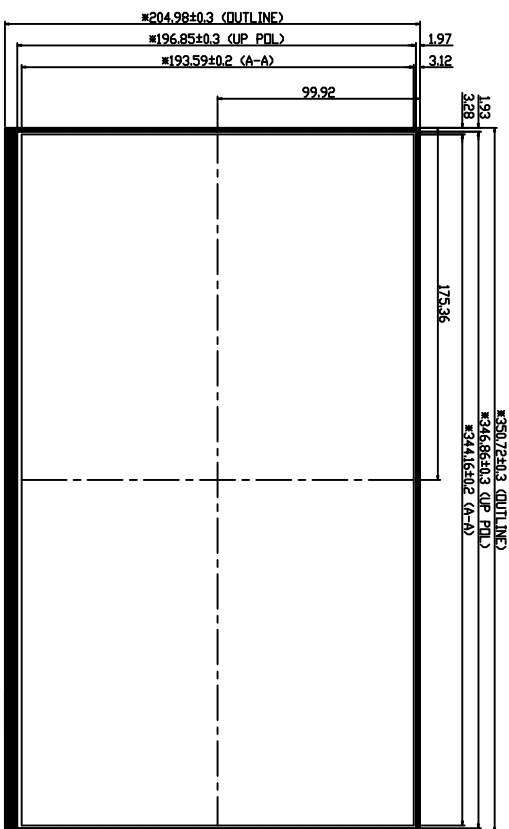

Notes:

- Unit:mm.
- Do not scale drawing.
- All radii without dimension R0.2.
- Modification Mark.
- draft angle: 1°
- Backlight Luminance :250cd/m<sup>2</sup>(Min), 280cd/m<sup>2</sup>(TYP)
- Luminance uniformity: 75%(min) (min/max\*100%)
- Unspecified Tolerance is ±0.5
- Operation conditions :If= 100mA, Vf=28~32V
- Color coordinate:X=0.27~0.35, Y=0.28~0.36
- All materials comply with RoHS
- The measured value of Luminance and color coordinate bases FX's BM-7
- Check item:1~9



REV	DATE	DESCRIPTION(修改内容)	REV/USER

Customer:  
客户

Approval Date:  
确认日期

Approve by:  
确认

NO.	DESCRIPTION	Quantity
12	Front iron frame (上铁框)	0
11	Connector+Wire (连接器+导线)	0
10	Double sided stick (双面胶)	2
9	HOT-SING (铜胶框)	0
8	PCB(柔性电路板)	0
7	Wire (导线)	1
6	LED (发光二极管)	50
5	BEFF(背光片)	2
4	Diffuser Film(扩散片)	1
3	Light guide plate (导光板)	1
2	Reflector film(反射膜)	1
1	Rear iron frame (下铁框)	1