

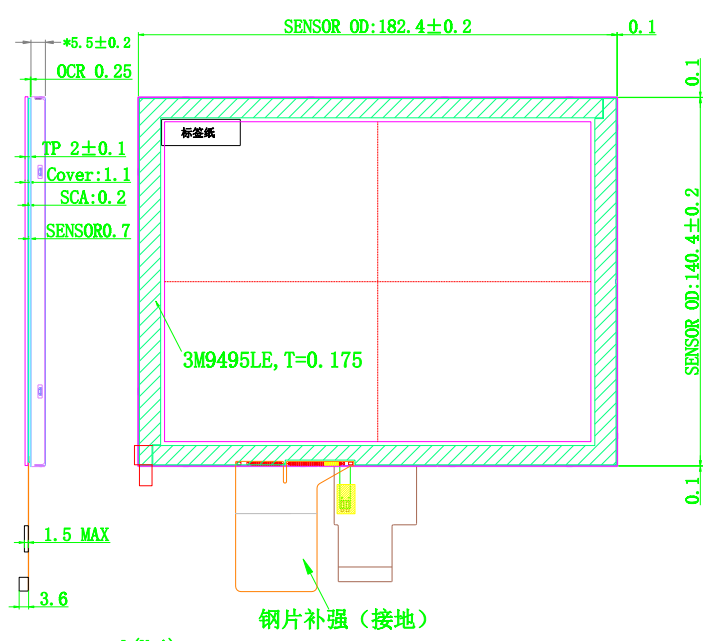


修改	修改内容	日期

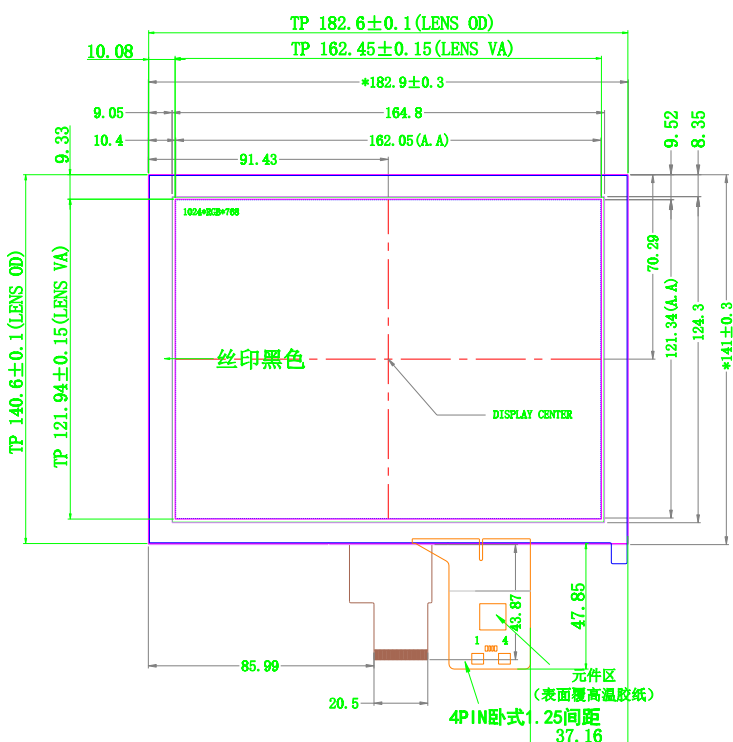

- Notes:  
 1. Unit: mm,  
 2. Do not scale drawing,  
 3. Genral tolerance: ±0.3.  
 4. "△" Modification rev number.  
 5. "\*" For important dimension, (O) for reference dimension.  
 6. RoHs must be complied. (Use Lead-free process).  
 7. Operating Temperature: -30~+80° C, Storage: -30~+90° C.



ITEM	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Luminous (LCM)	AVG	900	1000	1100	cd/m <sup>2</sup>	T=25° C 所有测试 误差为5%, 以恒定电 流测试.
Chromaticity	X	0.25	—	0.33		
Coordinates	Y	0.26	—	0.34		
Uniformity	MIN	75	80	%		
Backlight voltage	VF	8.7	9.3	10.5	V	
Backlight current	IF	—	420	—	mA	

类型 (TYPE)	模组成品图	材料 (MATERIAL)	页次 (PAGE)	设计 (DESIGNED)
模组号 (MODEL NO)	DBT0801XC40L110A	版本号 (EDITION)	1/1	核对 (CHECK)
客户型号 (CST'S CODE)		日期 (DATE)	2024.08.05	承认 (APPROVED)

APTUS INTERNATIONAL CO., LTD