

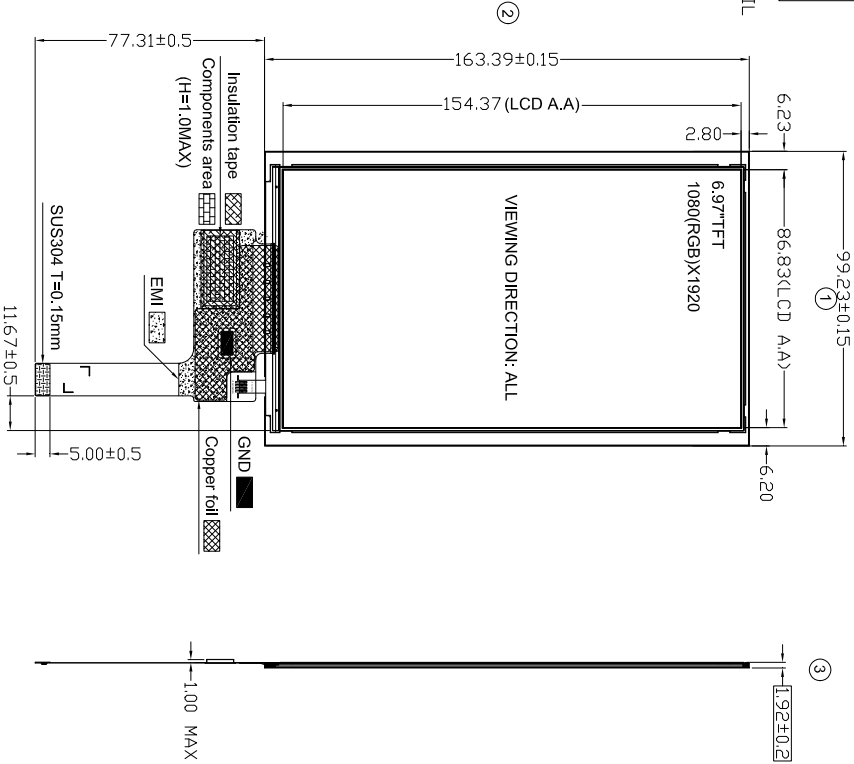


# 8 Mechanical Drawing


No.	Symbol	LCM
1	ID(GND)	
2	NC	
3	NC	
4	NC	
5	NC	
6	GND	
7	TP_RESET	
8	TP_I2C_SDA	
9	TP_I2C_SCL	
10	TP_INT	
11	NC	
12	LED_K3	
13	LED_K2	
14	LED_K1	
15	LED_A	
16	NC	
17	NC	
18	VSN	
19	VSP	
20	NC	
21	IOVCC	
22	RESET	
23	TE	
24	LEDPWM	
25	GND	
26	D2P	
27	D2N	
28	GND	
29	D1P	
30	D1N	
31	GND	
32	CLKP	
33	CLKN	
34	GND	
35	D0P	
36	D0N	
37	GND	
38	D3P	
39	D3N	
40	GND	



3LED\*12=36EA, 20mA\*12=240mA

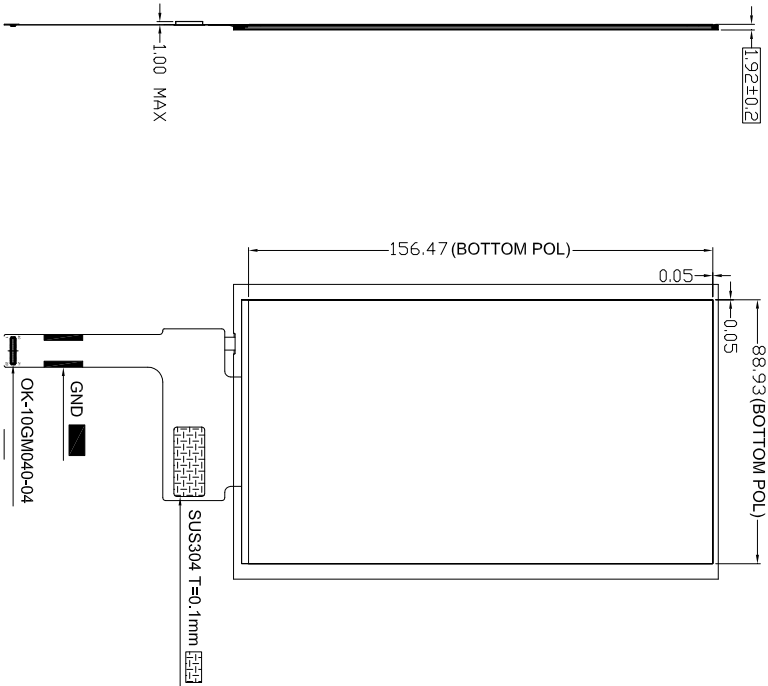

- NOTES:
- 1.DISPLAY TYPE: LTPS TFT
  - 2.VIEW DIRECTION: ALL
  - 3.OPERATION TEMPERATURE: -20°C~+70°C
  - 4.STORAGE TEMPERATURE: -30°C~+80°C
  - 5.UNMARKED CONNECTOR: OK-10GM040-04
  - 6.REQUIREMENT ON ENVIRONMENT PROTECTION: Q/S0002



型号: DBT070THC40M120A		设计		电子审核		结构审核		批准	
FILE NAME	UNIT	SIZE							
	mm	A4	2022.07.27						