

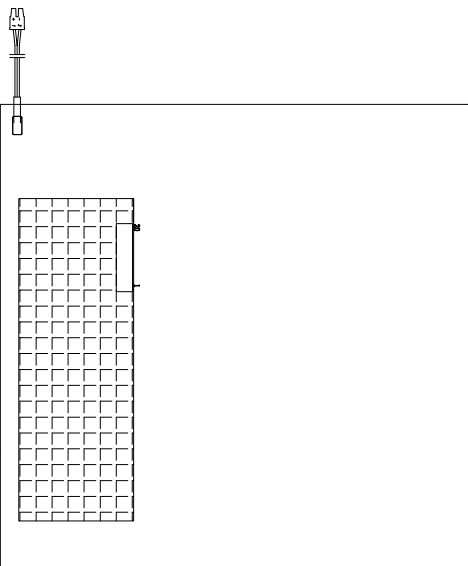


8. Mechanical Drawing

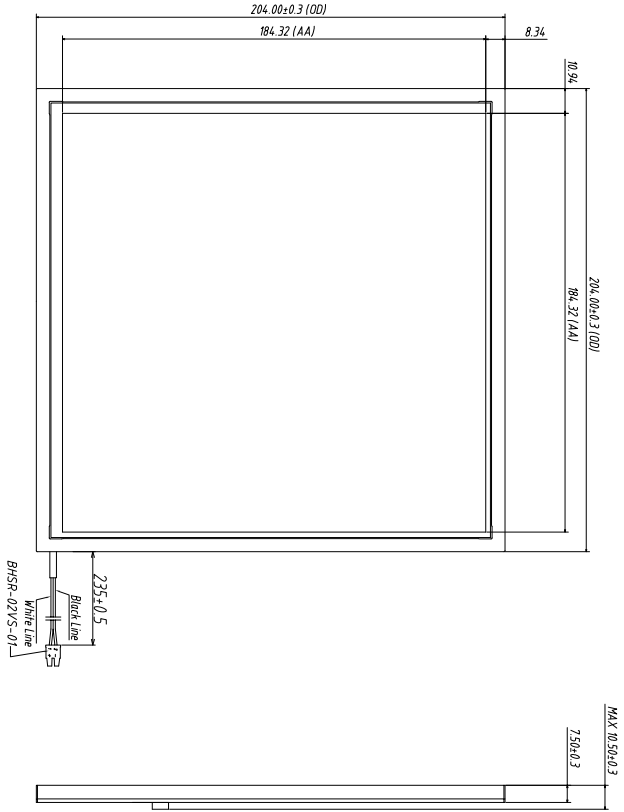

- Note:**
1. Backlight parameter:
Voltage: 9V ~ 10.2V
Current: 590mA ~ 640mA
 2. Brightness: 500 cd/m²
 3. LED Circuit:

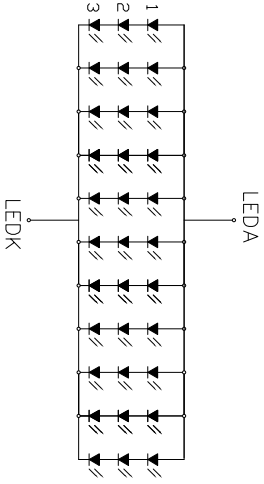

LCM Pin Assignment

No.	Symbol	Description
1	LVDS_D0P	LVDS_D0 Pare differential small amplitude signals
2	LVDS_D0N	LVDS_D0 Pare differential small amplitude signals
3	NC	No connection
4	SELB	NO
5	GND	Ground
6	LVDS_CLKP	LVDS_CLK Pare differential small amplitude signals
7	LVDS_CLKN	LVDS_CLK Pare differential small amplitude signals
8	GND	Ground
9	LVDS_D2P	LVDS_D2 Pare differential small amplitude signals
10	LVDS_D2N	LVDS_D2 Pare differential small amplitude signals
11	GND	Ground
12	LVDS_D1P	LVDS_D1 Pare differential small amplitude signals
13	LVDS_D1N	LVDS_D1 Pare differential small amplitude signals
14	GND	Ground
15	LVDS_D0P	LVDS_D0 Pare differential small amplitude signals
16	LVDS_D0N	LVDS_D0 Pare differential small amplitude signals
17	UPDN	
18	SHLR	
19	VDD3V3	Power supply, 3.0-3.6V, Itype: 3.3V
20	VDD3V3	Power supply, 3.0-3.6V, Itype: 3.3V

Drawn By : Chen Pingping	Material :	Product : 10.3 Inch Module
Checked By :	Drawing Date : 2024/10/20	Version : 1.0
Confirmed By :	First Angle Projection	Product No. : DBC103HXX201050A
	Tolerance : ±0.20	

APTUS INTERNATIONAL Co., LTD