

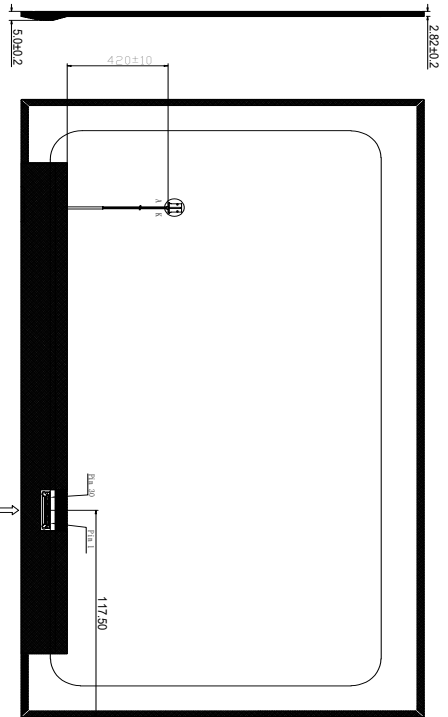


Appendix. OUTLINE DRAWING

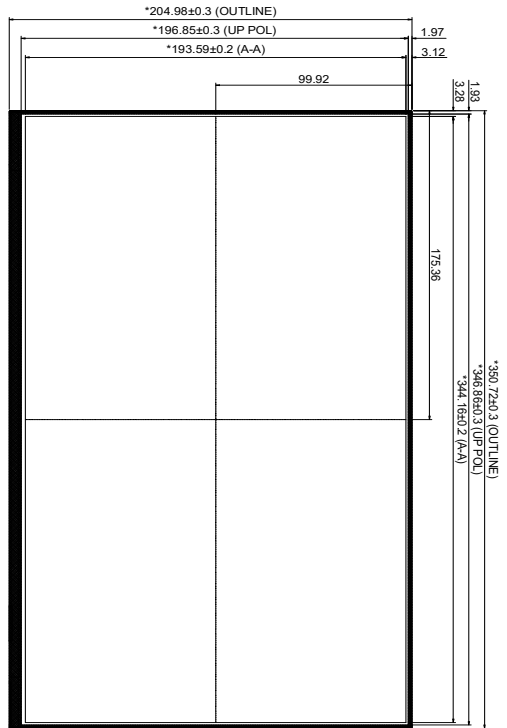



Notes:

1. Unit:mm
2. Do not scale drawing.
3. All radii without dimension R0.2.
4. Δ Modification Mark.
5. draft angle: 1°
6. Backlight Luminance :600cd/m²(TYP)
7. Luminance uniformity: 75%(min) (min/max*100%)
8. Unspecified Tolerance is ± 0.5
9. Operation conditions :If= 240mA, Vf=33.6~37.2V
Color coordinate: X=0.27-0.35, Y=0.28-0.36
10. All materials comply with RoHS
11. The measured value of luminance and color coordinate bases FY's BM-7
- 12: Check item: 1~9

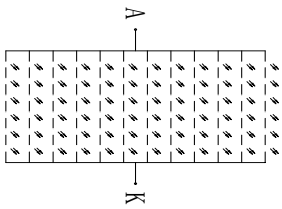

6串12并双芯片 6V/20mA
Backlight LED Circuit



Drawn By : Chen Pingping	Material :	APTUS INTERNATIONAL Co., LTD
Checked By :	Drawing Date : 2025/08/20	Product : 15.6 Inch Module
Confirmed By :	TOLERANCE PROJECTION 	Version : 1.0
		Product No. DPT156DHN30E060A