



SHENZHEN APTUS INTERNATIONAL CO., LIMITED

PRODUCT SPECIFICATION

3.4" COLOR TFT-LCD MODULE

MODEL NAME: DBT034BFN40R035A

DOC VERSION: 1.0

TOTAL PAGES: 15

DATE: 2021.05.27

FOR CUSTOMER	
CUSTOMER APPROVED	

NOTE: THE CONTENT OF THIS SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

**ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS PATER SHALL NOT BE
REPRODUCED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM APTUS
INTERNATIONAL CO., LIMITED.**

Contents

1.Record of Revision.....	3
2 .General Specifications	4
3 .Input/Output Terminals	5
4. Absolute Maximum Ratings.....	6
5 .Electrical Characteristics.....	6
6 .Interface Timing.....	7
7. Optical Characteristics.....	8
8 . Environmental / Reliability Tests	11
9. Mechanical Drawing	12
10.Packing.....	13
11. Precautions For Use of LCD modules.....	14

1. Record of Revision

Version	Revise Date	Content	Editor
1.0	2021/05/27	First Release.	Rich Liang

2 General Specifications

Feature		Spec
Characteristics	Size	3.4 inch
	Resolution	480(horizontal)*480(Vertical)
	Interface	3SPI+18BIT RGB
	Connect type	Connector
	Color Depth	16.7M
	Technology type	a-Si
	Pixel pitch (mm)	0.042x0.126
	Pixel Configuration	R.G.B. Vertical Stripe
	Display Mode	Normally Black
	LCD Driver IC	ST7701S
	Viewing Direction	ALL
	Gray Scale Inversion Direction	ALL
Mechanical	LCM (W x H x D) (mm)	70.45*70.34*2.2
	Active Area(mm)	60.48 x 60.48
	With /Without TSP	Without TSP
	Weight (g)	TBD
	LED Numbers	8 LED

Note 1: Viewing direction is following the data which measured by optics equipment.

Note 2: Requirements on Environmental Protection: RoHS

Note 3: LCM weight tolerance: +/- 5%

3 Input/Output Terminals

Pin.No	Symbol	Function
1	LEDA	Power for LED backlight (Anode)
2	LEDK1	Power for LED backlight (Cathode)
3	LEDK2	Power for LED backlight (Cathode)
4	GND	Ground
5	VCC	Digital Power +3.3V
6	RSTB	Global reset pin
7-8	NC	Not connect
9	SDA	SPI Data signal
10	SCL	SPI Clock signal
11	CS	SPI Chip select signal
12	DCLK	RGB dot clock signal
13	DE	RGB data enable signal
14	VS	RGB frame synchronizing signal
15	HS	RGB line synchronizing signal
16-33	DB0~DB17	RGB data signal
34	GND	Ground
35	TP_INT/NC	Touch Interrupt/NC
36	TP_SDA/NC	Touch IIC Data signal/NC
37	TP_SCL/NC	Touch IIC Clock signal/NC
38	TP_RESET/NC	Touch Reset Signal/NC
39	TP_VCI/NC	Touch Power supply/NC
40	GND	Ground

4 Absolute Maximum Ratings

Item	Symbol	MIN	MAX	Unit	Remark
Supply Voltage	V_{DD}	-0.3	3.6	V	
Input Signal Voltage	V_{in}	-0.3	$V_{DD}+0.3$	V	
Logic Output Voltage	V_{OUT}	-0.3	$V_{DD}+0.3$	V	
Operating Temperature	T_{OPR}	-20	70	°C	
Storage Temperature	T_{STG}	-30	80	°C	

5 Electrical Characteristics

5.1 Operating conditions:

Parameter	Symbol	MIN	TYP	MAX	Unit	Test condition
Power Voltage	V_{DD}	2.8	3.3	3.6	V	
Supply Current	I_{DD}			50	mA	$V_{DD}=2.8V, T_a=25^{\circ}C$
Input voltage	V_{IH}	0.8VDD	-	VDD	V	-
	V_{IL}	0	-	0.2VDD	V	-
Input leakage current	I_{IL}	-1.0	-	1.0	uA	$V_{IN}=V_{DD}$ or V_{SS}

5.2 Driving Backlight

Item	Symbol	MIN	TYP	MAX	Unit	Remark
LED current	I_F	-	40	-	mA	Note 1 Note 2,3
Power Consumption			-	-	mW	
LED Voltage	V_F	11.6	12	12.4	V	
LED Life Time	W_{BL}	25000		-	Hr	


Note 1 : There are 2*4 Groups LED

Note 2 : $T_a = 25^{\circ}C$

Note 3 : Brightness to be decreased to 50% of the initial value

6 INTERFACE TIMING

6.1 System Bus Read/Write Characteristics.

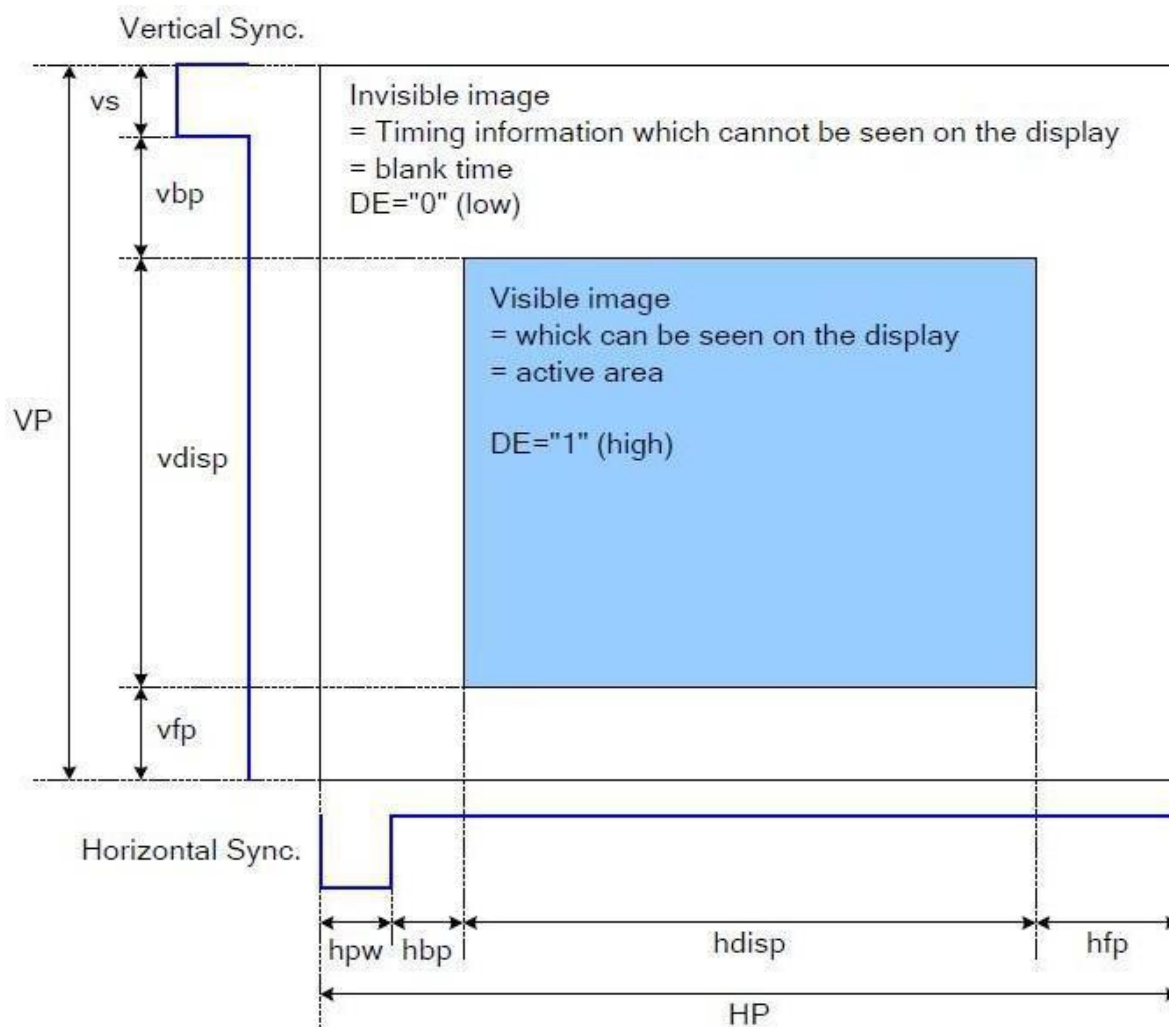



Please refer to the following table for the setting limitation of RGB interface signals.

Parameter	Symbol	Min.	Typ.	Max.	Unit
Horizontal Sync. Width	hpw	1	-	255	Clock
Horizontal Sync. Back Porch	hbp	1	--	255	Clock
Horizontal Sync. Front Porch	hfp	1	--	-	Clock
Vertical Sync. Width	vs	1	--	254	Line
Vertical Sync. Back Porch	vbp	1	--	254	Line
Vertical Sync. Front Porch	vfp	2	--	--	Line


Note:

1. Typical value are related to the setting frame rate is 60Hz..

6.2 Power ON/OFF Timing

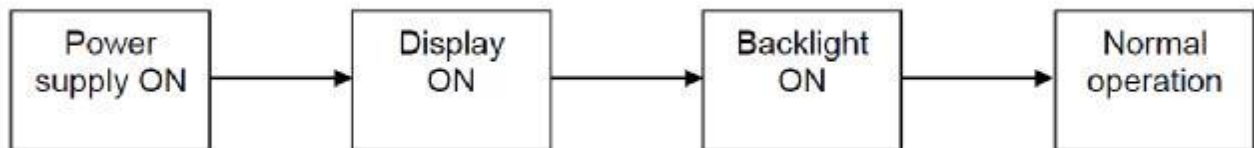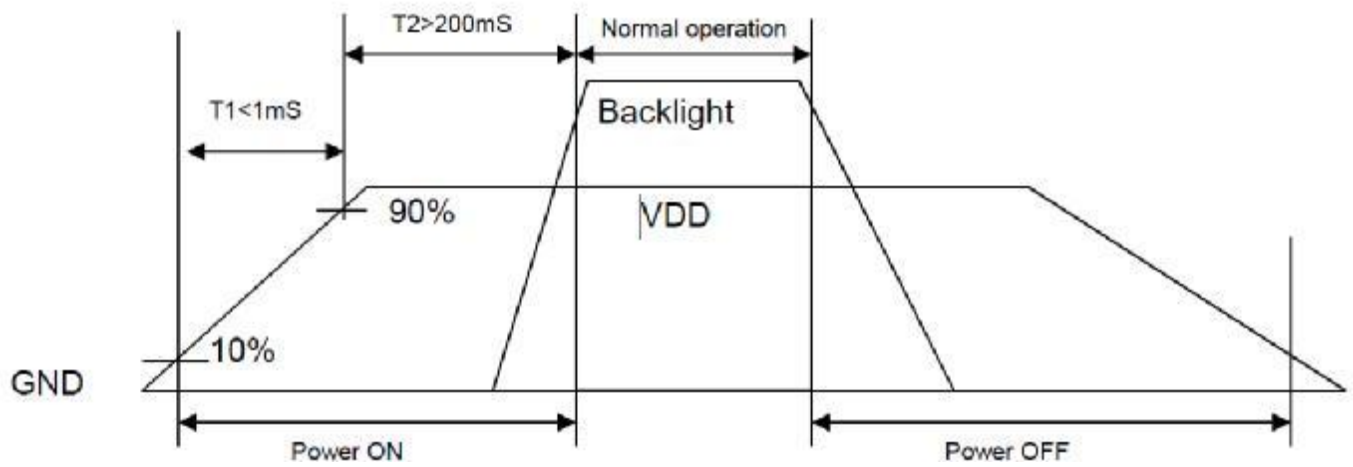

Power ON sequence

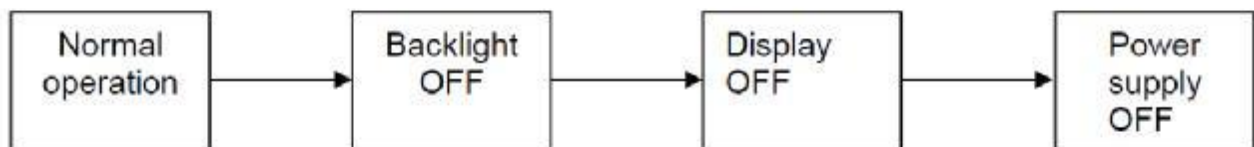


Power OFF sequence

7. Optical Characteristics

Items		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angles		θ_T	Center CR≥10	-	80	-	Degree.	Note2
		θ_B		-	80	-		
		θ_L		-	80	-		
		θ_R		-	80	-		
Contrast Ratio		CR	$\Theta =0$	700	900	-	-	Note1, Note3
Response Time		T _{ON}	25°C	-	30	40	ms	Note1, Note4
		T _{OFF}		-	-	-		
Chromaticity	White	X _W	Backlight is on	0.324	0.326	0.328	-	Note1, Note5
		Y _W		0.364	0.366	0.368	-	
	Red	X _R		0.611	0.613	0.615	-	
		Y _R		0.333	0.335	0.337	-	
	Green	X _G		0.305	0.307	0.309	-	
		Y _G		0.558	0.560	0.562	-	
	Blue	X _B		0.133	0.135	0.137	-	
		Y _B		0.158	0.160	0.162	-	
Uniformity		U		80	-	-	%	Note1, Note6
NTSC					70		%	Note5
Luminance		L		300	350			Note1, Note7

Test Conditions:

1. IF= 20mA (one channel),the ambient temperature is 25°C.
2. The test systems refer to Note 1 and Note 2.

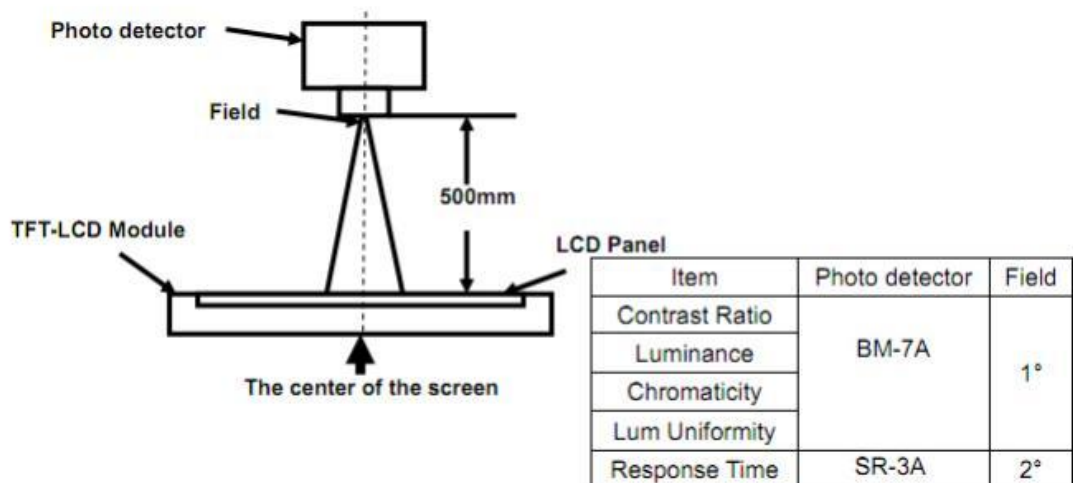

Note 2: Definition of viewing angle range and measurement system.

Viewing angle is measured at the center point of the LCD by CONOSCOPE (ergo-80).

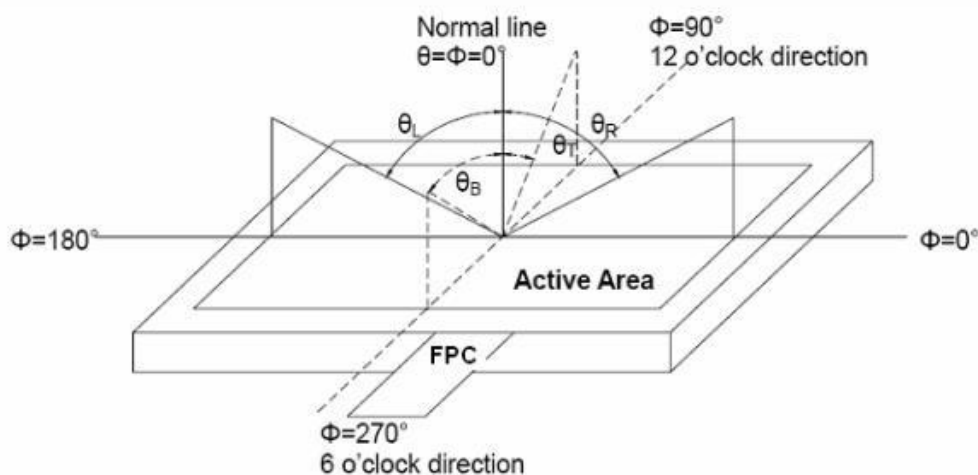



Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

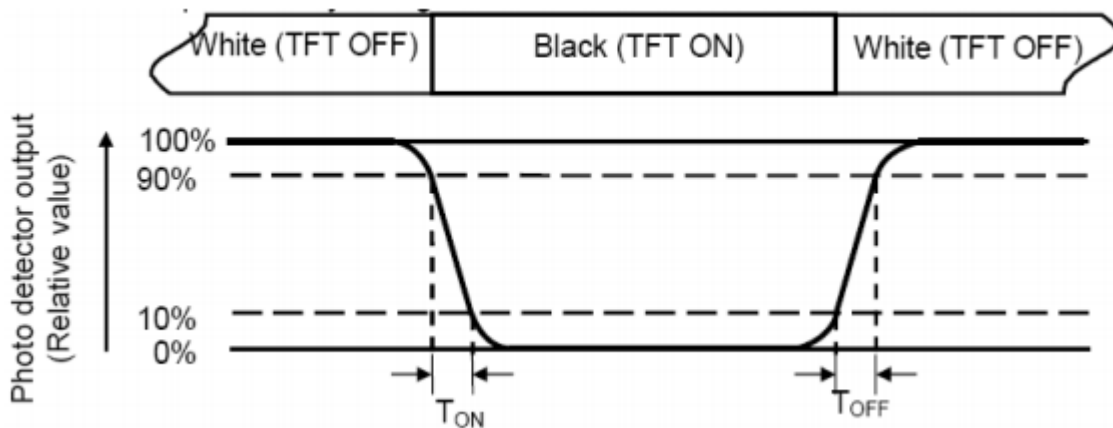

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the Center of each measuring area

Luminance Uniformity (U) = $L_{min} / L_{max} \times 100\%$

L-----Active area length W----- Active area width

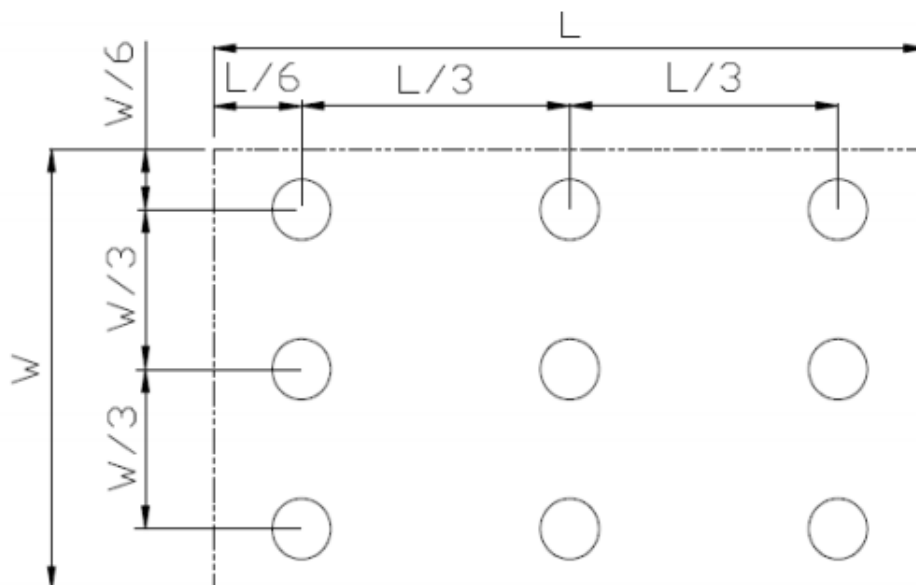


Fig. 2 Definition of uniformity

L_{max} : The measured maximum luminance of all measurement position.

L_{min} : The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance:

Measure the luminance of white state at center point.


8. Environmental / Reliability Tests

No	Test Item	Condition	Remarks
1	High Temperature Operation	T _s = +70°C, 240hrs	Note 1 IEC60068-2-2, GB2423. 2-89
2	Low Temperature Operation	T _a = -20°C, 240hrs	Note 2 IEC60068-2-1 GB2423.1-89
3	High Temperature Storage	T _a = +80°C, 240hrs	IEC60068-2-2 GB2423. 2-89
4	Low Temperature Storage	T _a = -30°C, 240hrs	IEC60068-2-1 GB/T2423.1-89
5	High Temperature & Humidity Storage	T _a = +60°C, 90% RH max, 160 hours	IEC60068-2-3 GB/T2423.3-2006
6	Thermal Shock (Non-operation)	-30°C 30 min ~ +80°C 30 min Change time: 5min, 30 Cycle	Start with cold temperature, end with high temperature IEC60068-2-14, GB2423.22-87
7	Electro Static Discharge (Operation)	C=150pF, R=330 Ω, 5 points/panel Air:±8KV, 5 times; Contact: ±4KV, 5 times; (Environment: 15°C ~ 35°C, 30% ~ 60%, 86Kpa ~ 106Kpa)	IEC61000-4-2 GB/T17626.2-1998
8	Vibration (Non-operation)	Frequency range: 10~55Hz, Stroke: 1.mm Sweep: 10Hz~55Hz~10Hz 2 hours for each direction of X .Y. Z. (package condition)	IEC60068-2-6 GB/T2423.5-1995
9	Shock (Non-operation)	60G 6ms, ± X, ±Y , ± Z 3 times for each direction	IEC60068-2-27 GB/T2423.5-1995
10	Package Drop Test	Height: 80 cm, 1 corner, 3 edges, 6 surfaces	IEC60068-2-32 GB/T2423.8-1995

Note: 1. T_s is the temperature of panel's surface.


2. T_a is the ambient temperature of sample.

9. Mechanical Drawing

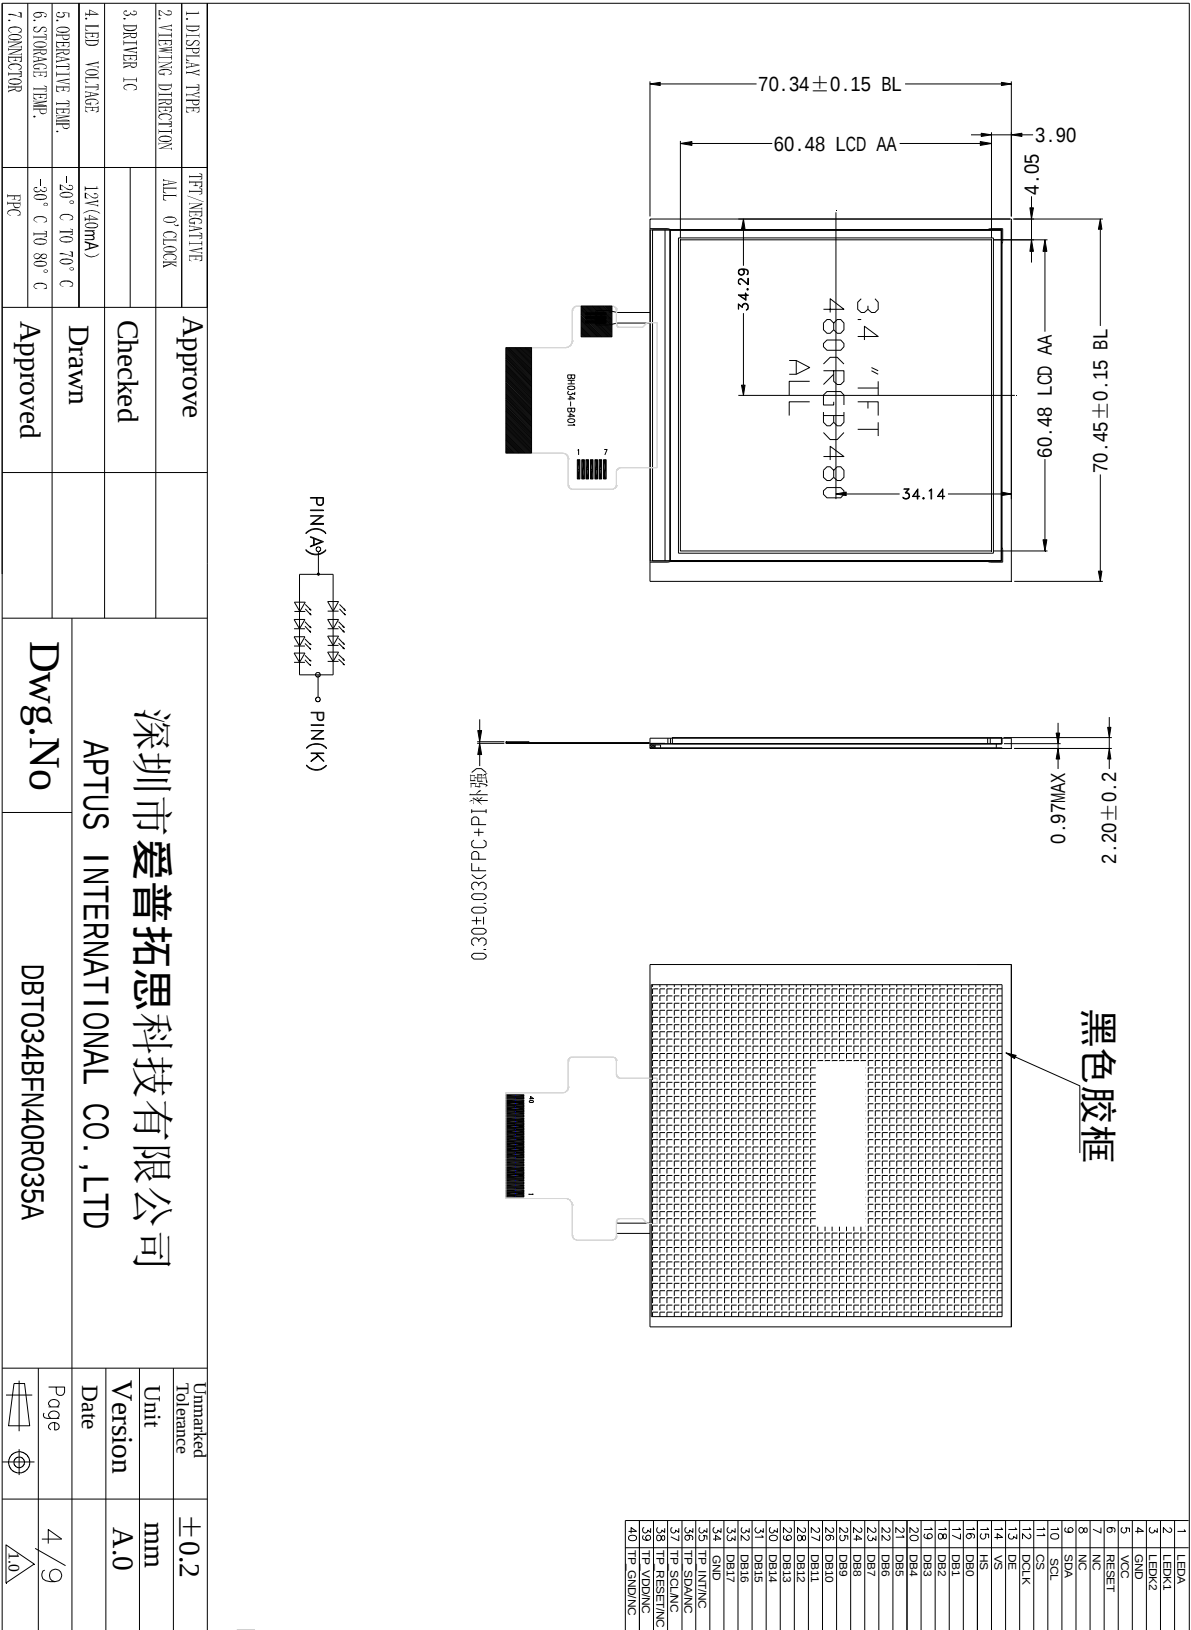

10. Packing

Packing Method

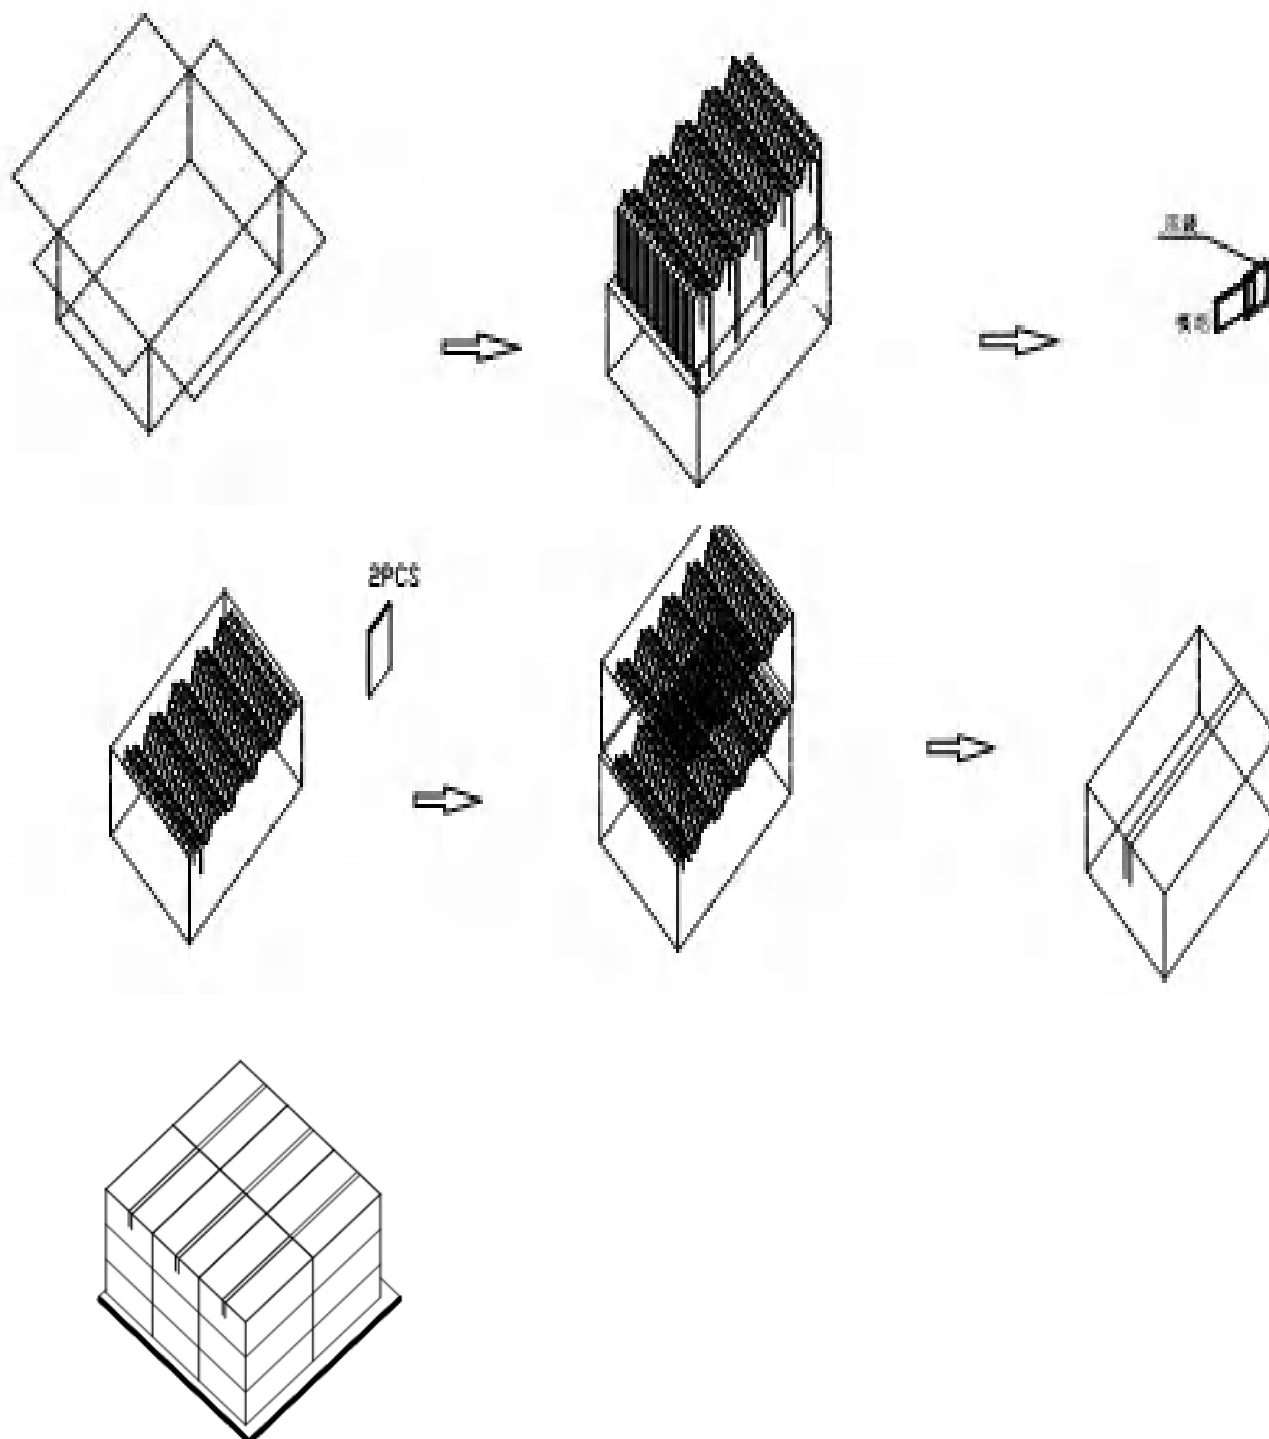

11. Precautions for Use of LCD modules

11.1 Handling Precautions

11.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

11.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

11.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

11.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

11.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketene
- Aromatic solvents

11.1.6. Do not attempt to disassemble the LCD Module.

11.1.7. If the logic circuit power is off, do not apply the input signals.

11.1.8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

11.1.8.1. Be sure to ground the body when handling the LCD Modules.

11.1.8.2. Tools required for assembly, such as soldering irons, must be properly ground.

11.1.8.3. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

11.1.8.4. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

11.2 Storage Precautions

11.2.1. When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

11.2.2. The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommended condition is:

Temperature : 0°C ~ 40°C Relatively humidity: ≤80%

11.2.3. The LCD modules should be stored in the room without acid, alkali and harmful gas.

11.3 Transportation Precautions

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.